




Motorola Q700 Sidekick Motherboard Replacement

enable user to remove and replace motherboard

Written By: Rich

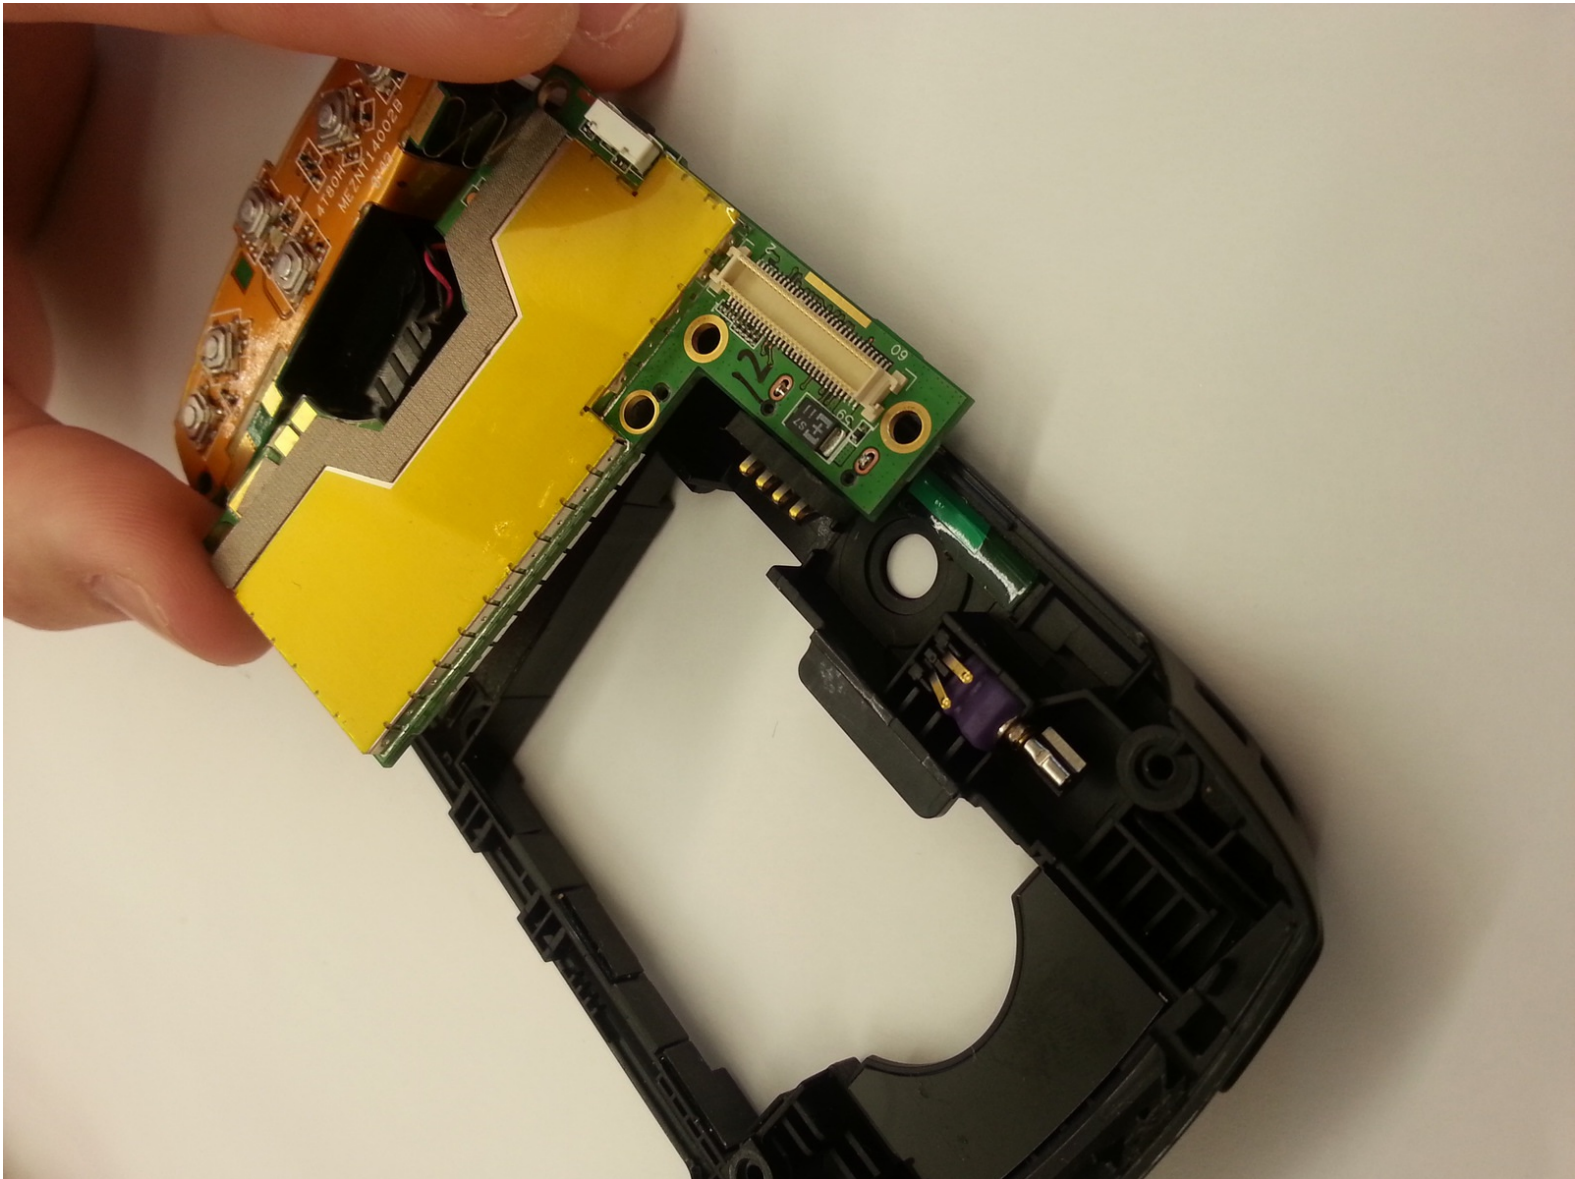



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:


- [Motorola Sidekick Q700 Motherboard](#) (1)

Step 1 — Phone



- When looking at the front of the phone, use the Plastic Opening Tool to pry off the four buttons located in each of the corners on the front.

Step 2

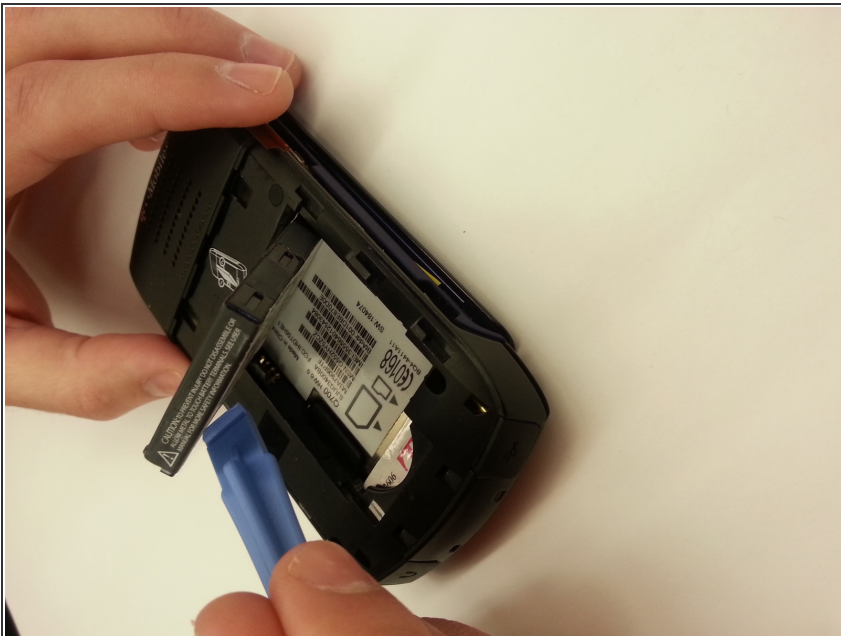


- Turn the phone face-down. Remove the back cover, exposing the battery.
- Use the Plastic Opening Tool to pry the battery out of the phone.

Step 3




- Using the appropriate size Phillips screwdriver, unscrew the four screws located in each of the corners on the back of the device.
- Although the battery is shown in this picture, please remember to make sure that it is removed in order to proceed with disassembly.

Step 4

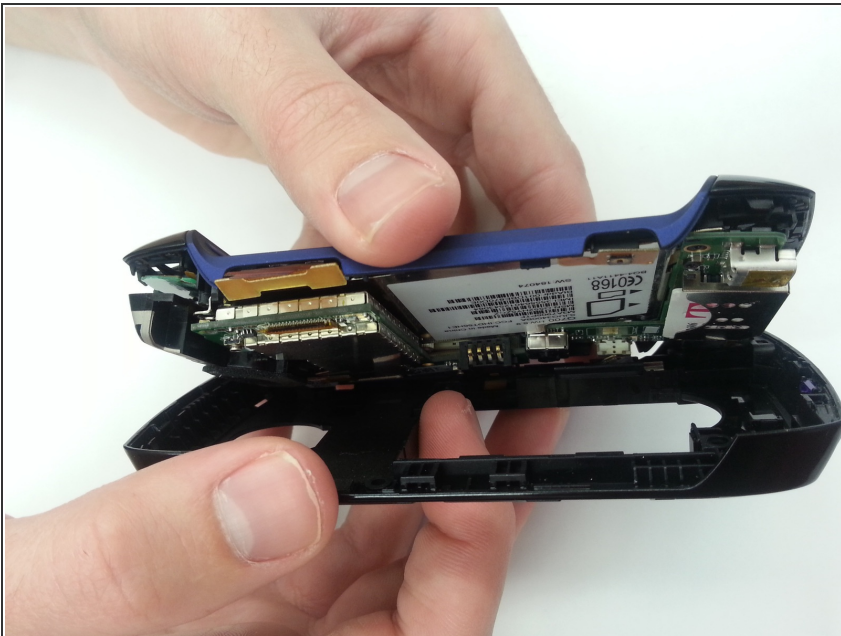

- After removal of the back screws, use the Plastic Opening Tool to carefully separate the top and bottom halves of the device.

Step 5

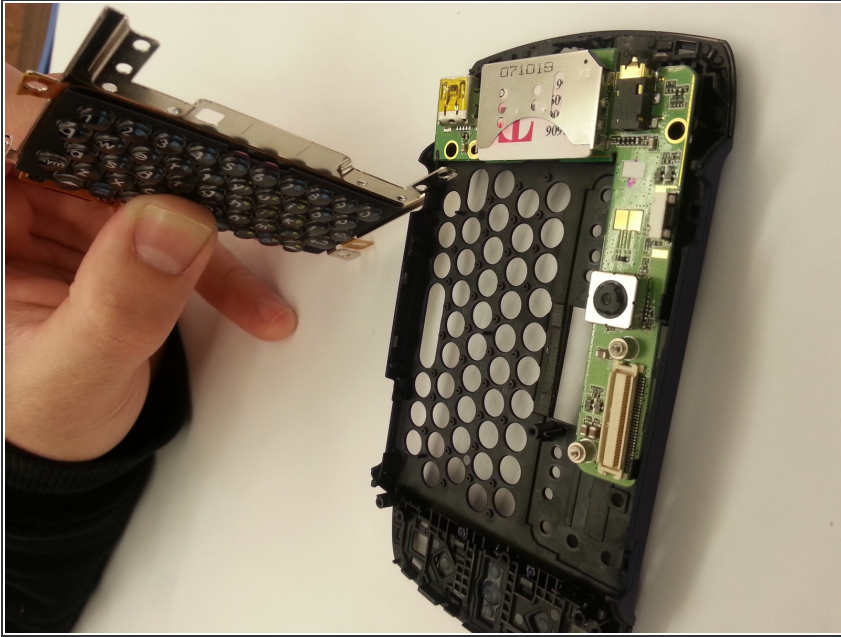


- Using the appropriate size Phillips screwdriver, remove any screws that are attached or associated with the keypad and carefully remove keypad from the device.


Step 6



- On the back of the device, you will see individual green and yellow technical pieces. Remove those two pieces from the phone with your fingers and set aside.

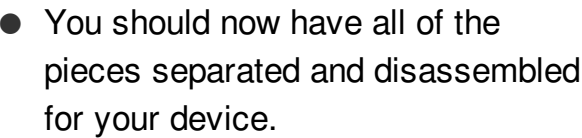

Step 8 — Motherboard

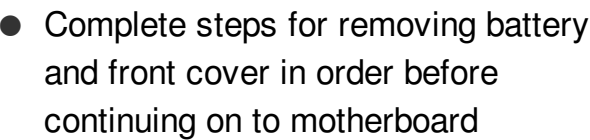

Step 9



- Remove all technical componets

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 04:24:44 AM.